




and automatic upgrades. Our torch tower is the most versatile available with features like air positioning (in/out) a motorized carriage along the bed plus adjustable slide and rotary positioner allowing torch entry from any angle. The air controlled tailstock provides clamping forces up to 170 pounds for holding part during welding and can be locked into position anywhere along the lathe bed.

## STANDARD FEATURES INCLUDE

- Vertical & Horizontal operation
- Square steel tube frame
- Lengths from 15" to 72" (work area)
- · Welds diameters to 15"
- Precision headstock bearing
- Stainless steel spindle with 1.250" through bore
- .1-99 rpm speed range
- Self centering 3-jaw chuck
- Motorized torch tower movement
- · Air activated torch retract
- Quick positioning tailstock with lock
- Air activated live center with speed and pressure control
- 300 ampere ground





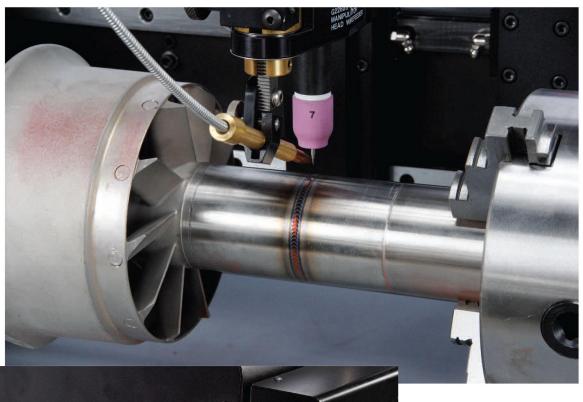



2651 Lavery Court, Newbury Park CA 91320, USA Tel. (805) 498-4004 | Fax. (805) 498-1761

## **Weldlogic Europe**

Blackstone Road, Huntingdon Cambridgeshire, PE29 6EF, UK Tel. 01480 437478 | Fax. 01480 437479