



Precision Welding Positioners




Headstock

With precision bearing, 2 ¼-8 threaded stainless steel spindle, 1.5" through bore, internal spring loaded copper grounding shoes and 3 jaw chuck. Front panel control pendant with .1 to 10 rpm adjustable speed range with forward and reverse direction selector. (Optional speed range 1-20rpm)

Torch Tower

Multi position torch tower can be positioned along positioner bed and includes air actuated in/out motion for clearance of part loading and unloading. Torch tower also includes vertical manual slide and graduated protractor torch angle adjustment.

System includes pneumatic hose and coupling, power cord, interconnect cables and ground cable.

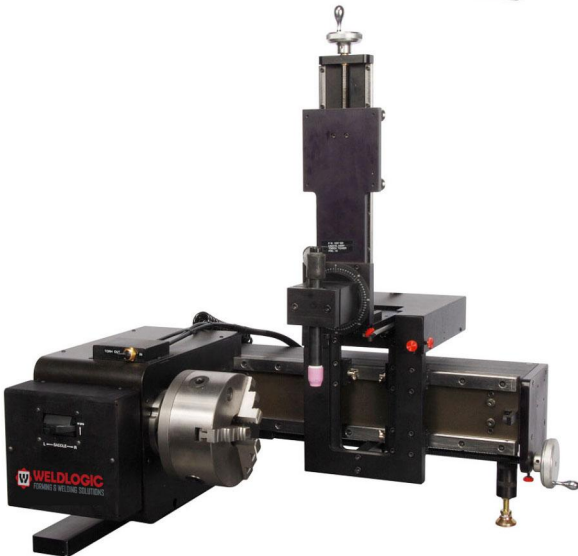

Weldlogic USA Engineering & Mfg.

2651 Lavery Court, Newbury Park
CA 91320, USA
Tel. (805) 498-4004 | Fax. (805) 498-1761

Weldlogic Europe

Blackstone Road, Huntingdon
Cambridgeshire, PE29 6EF, UK
Tel. 01480 437478 | Fax. 01480 437479